

TYPE GT4T

Features

- Manufactured from high strength 6061-T6 aluminum alloy
- Electro-tin plated
- UL Listed and CSA Certified for 600 volts, 90° C
- Compact design
- Range taking
- Re-usable
- Lay-in main conductor
- Insulating cover available

Benefits

- Suitable for use with either copper or aluminum conductors
- Provides low contact resistance
- Ensures reliability for copper or aluminum conductors
- Can make up to four taps off a single main which saves space and reduces installation time
- Permits inventories to be kept to a minimum
- Provides efficient use and flexibility in the field
- No need to break the feeder cable
- Eliminates taping

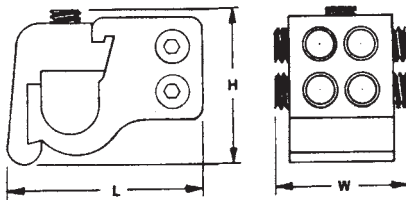


Fig. 1

Fig. 2

Catalog Number	Figure Number	Wire Range		No. of Taps	Dimensions			Hex Size	
		Main	Tap		L	W	H	Main	Tap
GT4T-250-2-1*	1	250kcmil-1/0	2-12 AL, 2-14 CU	4	2-3/16	1-1/8	1-35/64	5/16	Slot
GT4T-250-2-2*	2	250kcmil-1/0	2-12 AL, 2-14 CU	4	2-3/16	1-1/8	1-35/64	5/16	Slot
GT4T-350-2-1†	1	350kcmil-4/0	2-12 AL, 2-14 CU	4	2-17/32	1-1/8	1-17/32	3/8	Slot
GT4T-350-2-2*	2	350kcmil-4/0	2-12 AL, 2-14 CU	4	2-17/32	1-1/8	1-17/32	3/8	Slot
GT4T-500-2-1†	1	500kcmil-350kcmil	2-12 AL, 2-14 CU	4	2-31/32	1-1/4	1-11/16	3/8	Slot
GT4T-500-2-2†	2	500kcmil-350kcmil	2-12 AL, 2-14 CU	4	2-31/32	1-1/4	1-11/16	3/8	Slot
GT4T-500-0-1†	1	500kcmil-350kcmil	1/0-12 AL, 1/0-14 CU	4	2-31/32	1-1/4	1-11/16	3/8	Slot
GT4T-500-0-2†	2	500kcmil-350kcmil	1/0-12 AL, 1/0-14 CU	4	2-31/32	1-1/4	1-11/16	3/8	Slot

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

* GTC-250-350 Cover can be used. See page 138.

† GTC-500 can be used. See page 138.

DE-OX Inhibitor is recommended for all aluminum terminations.

Tested to UL 486A/B, UL File E6207

TYPE GT4T

Features

- Manufactured from high strength 6061-T6 aluminum alloy
- Electro-tin plated
- UL Listed and CSA Certified for 600 volts, 90° C
- Compact design
- Range taking
- Re-usable
- Lay-in main conductor
- Insulating cover available

Benefits

- Suitable for use with either copper or aluminum conductors
- Provides low contact resistance
- Ensures reliability for copper or aluminum conductors
- Can make up to four taps off a single main which saves space and reduces installation time
- Permits inventories to be kept to a minimum
- Provides efficient use and flexibility in the field
- No need to break the feeder cable
- Eliminates taping

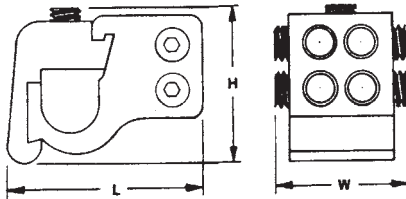


Fig. 1

Fig. 2

Catalog Number	Figure Number	Wire Range		No. of Taps	Dimensions			Hex Size	
		Main	Tap		L	W	H	Main	Tap
GT4T-250-2-1*	1	250kcmil-1/0	2-12 AL, 2-14 CU	4	2-3/16	1-1/8	1-35/64	5/16	Slot
GT4T-250-2-2*	2	250kcmil-1/0	2-12 AL, 2-14 CU	4	2-3/16	1-1/8	1-35/64	5/16	Slot
GT4T-350-2-1†	1	350kcmil-4/0	2-12 AL, 2-14 CU	4	2-17/32	1-1/8	1-17/32	3/8	Slot
GT4T-350-2-2*	2	350kcmil-4/0	2-12 AL, 2-14 CU	4	2-17/32	1-1/8	1-17/32	3/8	Slot
GT4T-500-2-1†	1	500kcmil-350kcmil	2-12 AL, 2-14 CU	4	2-31/32	1-1/4	1-11/16	3/8	Slot
GT4T-500-2-2†	2	500kcmil-350kcmil	2-12 AL, 2-14 CU	4	2-31/32	1-1/4	1-11/16	3/8	Slot
GT4T-500-0-1†	1	500kcmil-350kcmil	1/0-12 AL, 1/0-14 CU	4	2-31/32	1-1/4	1-11/16	3/8	Slot
GT4T-500-0-2†	2	500kcmil-350kcmil	1/0-12 AL, 1/0-14 CU	4	2-31/32	1-1/4	1-11/16	3/8	Slot

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

* GTC-250-350 Cover can be used. See page 158.

† GTC-500 Cover can be used. See page 158.

DE-OX Inhibitor is recommended for all aluminum terminations.

Tested to UL 486A/B, UL File E6207