Copper Neutral Bars
Extended Conductors
Conductor Range: #6-#14 and 1/0-#14

RoHS Compliant

TYPE
NBCE

Features
- Manufactured from high strength copper
- Electro-tin plated
- Assemblies available with 8-123 circuits
- UL Recognized for grounding and power, and CSA Certified

Benefits
- Provides maximum conductivity
- Low contact resistance
- Application versatility
- Ensures reliability

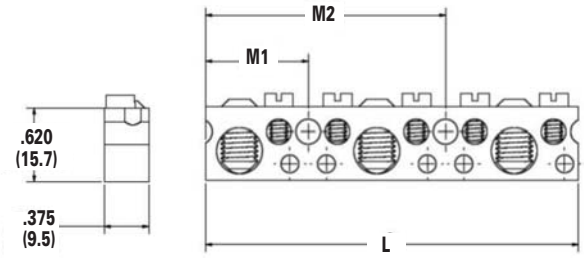

C

Catalog Number	Number of Large Circuits[1]	Number of Small Circuits[2]	Mounting Hole Locations[3] in. (mm) M1		M2		Dimensions in. (mm) L	
NBCE-0305-2	3	5	1.133	(28.8)	2.305	(58.5)	3.176	(80.7)
NBCE-0615-2	6	15	3.477	(88.3)	5.821	(147.9)	6.954	(176.6)
NBCE-1336-2	13	36	5.821	(147.9)	8.165	(207.4)	15.158	(385.0)
NBCE-3192-0	31	92	-	-	-	-	36.250	(920.8)

[1] Large Circuits have a conductor range of 1/0-14AWG
[2] Small Circuits have a conductor range of 6-14AWG
[3] Mounting holes have a diameter of 0.203 in. (5.2mm)

SCREWS

Type A Headless Slot Drive

Type B Headed Slot Drive

Catalog Number	Configuration
NBCE-0305-2	★●★○★●★○★●
NBCE-0615-2	★●★★★●★★★●★○★●★★★●★○★●★
NBCE-1336-2	★●★★★●★★★●★★★●★★★●★○★●★★★●★○★●★★★●★★★●★★★●★★★●★★★●★
NBCE-3192-0	★●★★★● ..... ★★★● x 28 ..... ★★★●★

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)
Tested to UL 486A/B, UL File E6207 and CSA C22.2 No. 65-03
Tested to UL 467, UL File E6207

★ Hole for small circuit
● Hole for large circuit
○ Hole for mounting screw

Copper Neutral Bars
Extended Conductors
Conductor Range: #6-#14 and 1/0-#14

RoHS Compliant

LR-29601

TYPE
NBCE

Features
- Manufactured from high strength copper
- Electro-tin plated
- Assemblies available with 8-123 circuits
- UL Recognized for grounding and power, and CSA Certified

Benefits
- Provides maximum conductivity
- Low contact resistance
- Application versatility
- Ensures reliability

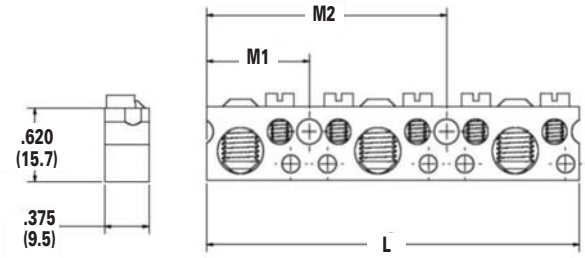

Catalog Number	Number of Large Circuits[1]	Number of Small Circuits[2]	Mounting Hole Locations[3] in. (mm)				Dimensions in. (mm)	
			M1		M2		L	
NBCE-0305-2	3	5	1.133	(28.8)	2.305	(58.5)	3.176	(80.7)
NBCE-0615-2	6	15	3.477	(88.3)	5.821	(147.9)	6.954	(176.6)
NBCE-1336-2	13	36	5.821	(147.9)	8.165	(207.4)	15.158	(385.0)
NBCE-3192-0	31	92	-	-	-	-	36.250	(920.8)

[1] Large Circuits have a conductor range of 1/0-14AWG
[2] Small Circuits have a conductor range of 6-14AWG
[3] Mounting holes have a diameter of 0.203 in. (5.2mm)

SCREWS

Type A
Headless
Slot Drive

Type B
Headed
Slot Drive

G

Catalog Number	Configuration
NBCE-0305-2	★●★○★●★○★●
NBCE-0615-2	★●★★★●★★★●★○★●★★★●★○★●★
NBCE-1336-2	★●★★★●★★★●★★★●★★★●★○★●★★★●★○★●★★★●★★★●★★★●★★★●★★★●★
NBCE-3192-0	★●★★★● ..... ★★★● x 28 ..... ★★★●★

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)
Tested to UL 486A/B, UL File E6207 and CSA C22.2 No. 65-03
Tested to UL 467, UL File E6207

★ Hole for small circuit
● Hole for large circuit
○ Hole for mounting screw

4730 Madison Road, Cincinnati OH 45227-1426 | PH: 513.533.6200 | FAX: 513.871.4084 | www.ilsco.com
In Canada: 1050 Lakeshore Road East, Mississauga, Ontario, Canada L5E 1E4 | PH: 905.274.2341 | FAX: 905.274.8763