



TYPE USGL

Features

- Compact, lay-in design
- Manufactured from high strength 6061-T6 aluminum for strength and conductivity
- High strength aluminum 5/16" drive torque screw
- Clear plated coating
- Designed for installation on standard NEMA mounting holes
- Suitable for use in circuits rated 35KV or less, proper high voltage spacing and insulation techniques must be used
- 1-3/4" NEMA spacing on mounting holes
- Rated to 90° C

Benefits

- Solves the problem of trying to bend larger size cables into place
- Dual rated for aluminum or copper conductors
- Enables range taking
- Provides low contact resistance
- Conforms to industry standards
- Application versatility
- Industry standard

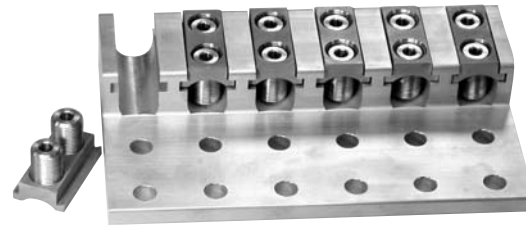

Catalog Number	Number of Mtg. Holes	Number of Ports	Wire Range	Mounting Bolt Size	Dimensions			Hex Size
					Width	Length	Height	
USGL-350R21	2	1	350 kcmil-6	1/2	1.50	4.69	1.56	5/16
USGL-350R42	4	2	350 kcmil-6	1/2	2.75	4.69	1.56	5/16
USGL-350R43	4	3	350 kcmil-6	1/2	4.00	4.69	1.56	5/16
USGL-350R64	6	4	350 kcmil-6	1/2	5.25	4.69	1.56	5/16
USGL-350R86	8	6	350 kcmil-6	1/2	7.75	4.69	1.56	5/16
USGL-350R128	12	8	350 kcmil-6	1/2	10.25	4.69	1.56	5/16
USGL-600R21	2	1	600 kcmil-2	1/2	1.68	5.35	1.69	5/16
USGL-600R42	4	2	600 kcmil-2	1/2	3.08	5.35	1.69	5/16
USGL-600R63	6	3	600 kcmil-2	1/2	4.81	5.35	1.69	5/16
USGL-600R84	8	4	600 kcmil-2	1/2	6.45	5.35	1.69	5/16
USGL-600R106	10	6	600 kcmil-2	1/2	8.69	5.35	1.69	5/16
USGL-600R148	14	8	600 kcmil-2	1/2	11.70	5.35	1.69	5/16
USGL-750R21	2	1	750 kcmil-1/0	1/2	1.76	5.97	1.81	5/16
USGL-750R42	4	2	750 kcmil-1/0	1/2	3.31	5.97	1.81	5/16
USGL-750R63	6	3	750 kcmil-1/0	1/2	4.88	5.97	1.81	5/16
USGL-750R84	8	4	750 kcmil-1/0	1/2	6.45	5.97	1.81	5/16
USGL-750R126	12	6	750 kcmil-1/0	1/2	9.95	5.97	1.81	5/16
USGL-750R148	14	8	750 kcmil-1/0	1/2	12.30	5.97	1.81	5/16
USGL-1000R21	2	1	1000 kcmil-1/0	1/2	2.00	6.19	1.88	5/16
USGL-1000R22	2	2	1000 kcmil-1/0	1/2	3.68	6.19	1.88	5/16
USGL-1000R42	4	2	1000 kcmil-1/0	1/2	3.68	6.19	1.88	5/16
USGL-1000R43	4	3	1000 kcmil-1/0	1/2	5.37	6.19	1.88	5/16
USGL-1000R63	6	3	1000 kcmil-1/0	1/2	5.37	6.19	1.88	5/16
USGL-1000R84	8	4	1000 kcmil-1/0	1/2	7.06	6.19	1.88	5/16
USGL-1000R126	12	6	1000 kcmil-1/0	1/2	10.44	6.19	1.88	5/16
USGL-1000R168	16	8	1000 kcmil-1/0	1/2	13.81	6.19	1.88	5/16

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)
Add T for tin plated, P for Pre-filled with De-Ox