





SCREW: NONE	MATERIAL: COPPER	REV: B	 800-776-9775 www.ilSCO.com
CAT. NO.: SEE CHART	PLATING: EL-TIN	DRAWN BY:KS SCALE: 1/2	
INFORMATION SHEET:TBD	MARKING: ILSO, CAT#, 	DATE:11/16/2015 SIZE: B	
			DWG NO: <b>R2665</b>
			SHEET: 1 OF 1



**NOTE:**

- 1) AMP RATING WILL VARY WITH AMBIENT CONDITIONS, ORIENTATION OF THE BRAID AND OTHER SERVICE CONDITIONS.
- 2) ALL SIZES ARE LISTED TO UL 467 GROUNDING AND BONDING EQUIPMENT STANDARDS

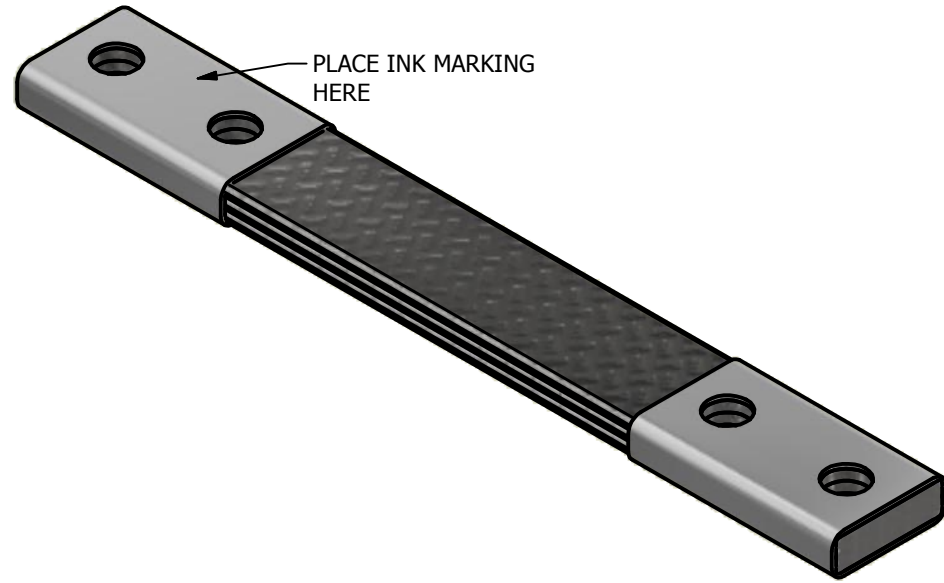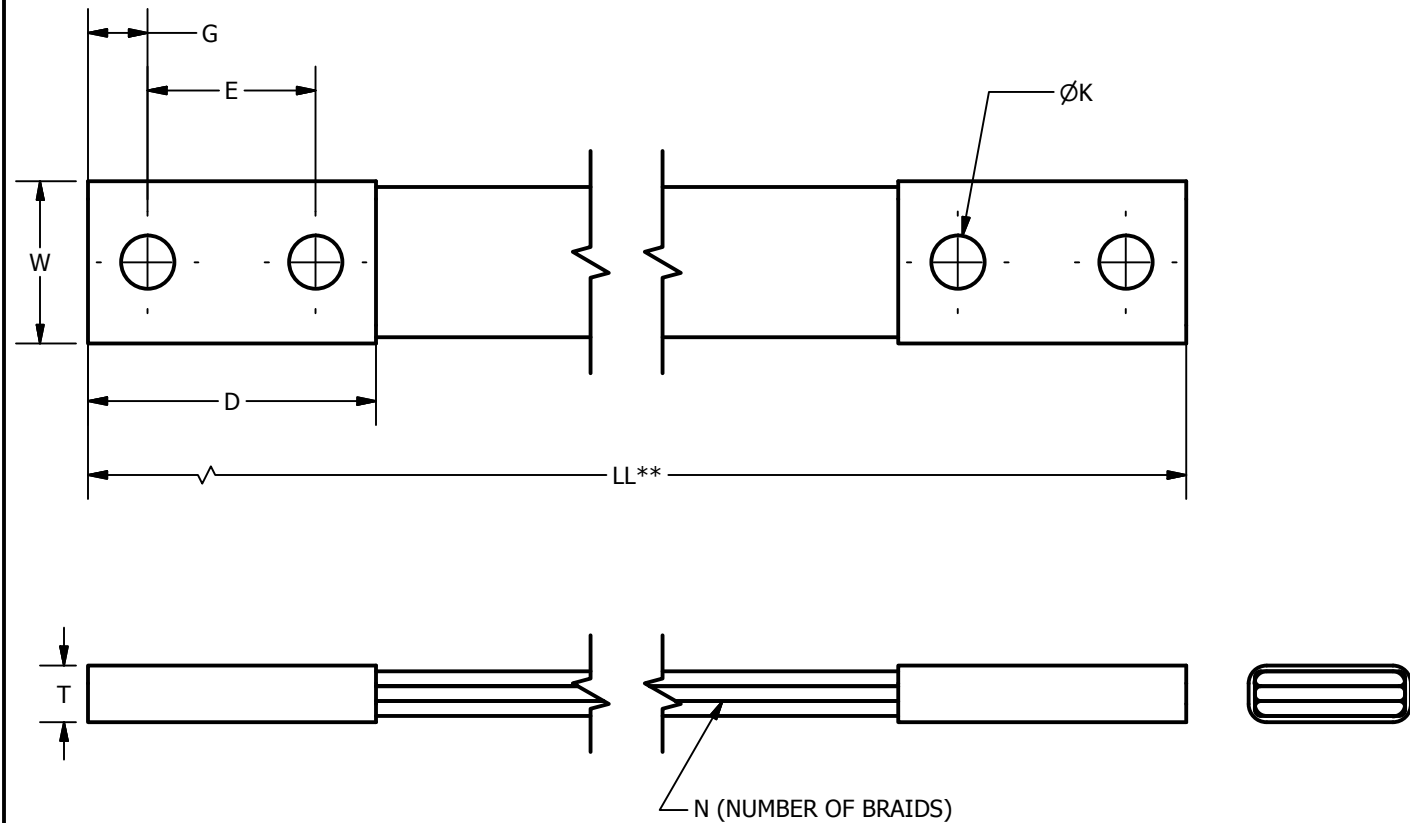

**\*\*STANDARD LENGTHS (LL) - 12", 18", 24", 36", 48"**

CAT. NO.	N	WIRE BUNDLE SIZE	WIRE EQUIVALENT	CIRCULAR MIL AREA	AMP RATING	T (in.)	D	W	E	G	K
FX-BD**	1	1x48-20-30	1 AWG	96,000	190	0.130	2.500	1.190	1.000	0.750	0.410
FX-BD**N	1	1x48-20-30	1 AWG	96,000	190	0.130	3.000	1.190	1.750	0.620	0.560
FX-BE**	1	2x24-35-30	3/0 AWG	168,000	340	0.210	2.500	1.250	1.000	0.750	0.410
FX-BE**N	1	2x24-35-30	3/0 AWG	168,000	340	0.210	3.000	1.250	1.750	0.620	0.560
FX-BF**	1	2x24-48-30	4/0 AWG	230,400	375	0.280	2.500	1.380	1.000	0.750	0.410
FX-BF**N	1	2x24-48-30	4/0 AWG	230,400	375	0.280	3.000	1.380	1.750	0.620	0.560
FX-BG**	1	2x48-35-30	300 kcmil	336,000	510	0.364	2.500	1.630	1.000	0.750	0.410
FX-BG**N	1	2x48-35-30	300 kcmil	336,000	510	0.364	3.000	1.630	1.750	0.620	0.560
FX-B2D**	2	1x48-20-30	154 kcmil	192,000	380	0.210	2.500	1.190	1.000	0.620	0.410
FX-B2D**N	2	1x48-20-30	154 kcmil	192,000	380	0.210	3.000	1.190	1.750	0.620	0.560
FX-B2E**	2	2x24-35-30	308 kcmil	336,000	530	0.350	2.500	1.250	1.000	0.750	0.410
FX-B2E**N	2	2x24-35-30	308 kcmil	336,000	530	0.350	3.000	1.250	1.750	0.620	0.560
FX-B2F**	2	2x24-48-30	464 kcmil	460,800	600	0.380	2.500	1.380	1.000	0.750	0.410
FX-B2F**N	2	2x24-48-30	464 kcmil	460,800	600	0.380	3.000	1.380	1.750	0.620	0.560
FX-B2G**	2	2x48-35-30	600 kcmil	672,000	875	0.500	2.500	1.630	1.000	0.750	0.410
FX-B2G**N	2	2x48-35-30	600 kcmil	672,000	875	0.500	3.000	1.630	1.750	0.620	0.560
FX-B3D**	3	1x48-20-30	231 kcmil	288,000	470	0.270	2.500	1.190	1.000	0.750	0.410
FX-B3D**N	3	1x48-20-30	231 kcmil	288,000	470	0.270	3.000	1.190	1.750	0.620	0.560
FX-B3E**	3	2x24-35-30	462 kcmil	504,000	700	0.580	2.500	1.250	1.000	0.750	0.410
FX-B3E**N	3	2x24-35-30	462 kcmil	504,000	700	0.580	3.000	1.250	1.750	0.620	0.560
FX-B3F**	3	2x24-48-30	696 kcmil	691,200	900	0.590	2.500	1.380	1.000	0.750	0.410
FX-B3F**N	3	2x24-48-30	696 kcmil	691,200	900	0.590	3.000	1.380	1.750	0.620	0.560
FX-B3G**	3	2x48-35-30	900 kcmil	1,008,000	1000	0.630	2.500	1.630	1.000	0.750	0.410
FX-B3G**N	3	2x48-35-30	900 kcmil	1,008,000	1000	0.630	3.000	1.630	1.750	0.620	0.560
FX-B4D**	4	1x48-20-30	308 kcmil	384,000	600	0.390	2.500	1.190	1.000	0.750	0.410
FX-B4D**N	4	1x48-20-30	308 kcmil	384,000	600	0.390	3.000	1.190	1.750	0.620	0.560
FX-B4E**	4	2x24-35-30	616 kcmil	672,000	875	0.800	2.500	1.250	1.000	0.750	0.410
FX-B4E**N	4	2x24-35-30	616 kcmil	672,000	875	0.800	3.000	1.250	1.750	0.620	0.560
FX-B4F**	4	2x24-48-30	928 kcmil	921,600	1000	0.870	2.500	1.380	1.000	0.750	0.410
FX-B4F**N	4	2x24-48-30	928 kcmil	921,600	1000	0.870	3.000	1.380	1.750	0.620	0.560
FX-B4G**	4	2x48-35-30	1200 kcmil	1,344,000	1200	1.000	2.500	1.630	1.000	0.750	0.410
FX-B4G**N	4	2x48-35-30	1200 kcmil	1,344,000	1200	1.000	3.000	1.630	1.750	0.620	0.560